



Data Center Solutions

V-Class Enterprise Server

HP 9000 V-Class Data Center Solutions

The HP 9000 V-Class Enterprise Server family has established itself as the business-critical–proven, high-performance data center computing platform that leading corporations depend on for their computing needs.

Now, the new HP 9000 V2500 Enterprise Server raises the performance bar once again by delivering the highest-performing, most robust application platform available on the market today.

So whatever your business problem requires—a powerful OLTP server, a high CPU count decision-support, sophisticated E-commerce platform, technical computing infrastructure, or a large server upon which to consolidate multiple applications—the HP 9000 V-Class provides the availability and scalability needed to meet your enterprise and technical data center needs.

You can choose an entry-level V-Class configuration to optimize your IT investment, knowing that the system will scale as your needs demand.

Combined with HP's unmatched experience in delivering large scale mission-critical solutions for the data center, and more than 15,000 ISV applications for HP-UX 11 and HP's partners, the HP V-Class provides the comprehensive UNIX® platform your enterprise can count on.

Mission-Critical Computing with the Industry's Most Powerful System

- Industry-leading 440-MHz PA-8500, 200-MHz and 240-MHz PA-8200 processors
- HP's Scalable Computing Architecture (SCA) for breakthrough performance
- Attractive entry-level price and a wide performance range
- Up to 128 CPUs*
- Up to 128 GB of memory*
- Up to 112 2X PCI slots*
- System-wide throughput of up to 61.66 GB/s* with HP's HyperPlane crossbar technology
- Up to 7.6-GB/s I/O throughput*
- N+1 redundant components for increased reliability
- * With SCA




The Ultimate Data Center Platform

In an increasingly competitive environment, companies must be able to rely on their IT infrastructure to provide business-critical applications. To ensure business success, requirements call for virtually risk-free solutions *and* cost efficiency, as total cost of ownership (TCO) is a critical criterion when selecting the optimal platform.

Ready to meet these challenges by setting new standards for enterprise computing, the HP 9000 V-Class Enterprise Server is the platform of choice for leading companies worldwide to run their mission-critical and most demanding commercial and technical applications.

Unmatched performance at both the component and application level allows the HP 9000 V-Class to address a wide range of real-life workloads—from batch and transaction processing to Java-based applications and technical computing.

With excellent scalability, additional resources can be added as needed to address even the most demanding requirements or to consolidate multiple applications on a single system. Based on the HP 9000 V-Class's proven reliability and serviceability, HP provides the complementary solutions and services that will enable 24x365 availability for your applications in a real-life environment.



For high-end computing, HP offers three models of V-Class servers. The V2200 is a 200-MHz PA-8200-based 16-way V-Class system. The V2250 is a 240-MHz PA-8200-based 16-way system. Both the V2200 and the V2250 can be upgraded to the 440-MHz PA-8500-based 32-way V2500. Based on HP's unique Scalable Computing Architecture (SCA), the V2500 allows you to scale up to 128 CPUs and 128 GB of memory.

HP 9000 V-Class: Designed for Performance

HP has designed powerful systems in which all components integrate together to deliver maximum performance. When upgrading from a V2250 to a V2500, the combined system performance of all key components—processor, I/O subsystem, memory subsystem—is doubled. HP-UX 11 provides scalability up to 128 processors, and leading ISVs have fine-tuned their applications to ensure maximum performance.

Powered by PA-RISC

The V2500 is powered by the lightning-fast 440-MHz 4-way superscalar PA-8500 processor. This new generation PA-RISC CPU provides unmatched performance and functionality. With the world's largest on-chip L1 cache, the V2500 provides significantly faster access to data. Prior to the V2500, both the V2200 and the V2250 set industry records for OLTP performance and price/performance. The V2500 will continue this tradition. All V-Class applications are binary compatible, therefore offering maximum investment protection.

HP's HyperPlane

At the core of the V-Class is HP's HyperPlane crossbar technology which provides high bandwidth and low latency access from CPU and I/O to local memory. It enables linear scaling without bus contention throughout the entire system and as resources are added. This non-blocking 8x8 crossbar provides 15.36-GB/s memory bandwidth with bi-directional 960 MB/s per port.

High-Speed Memory Subsystem

Featuring up to 256-way interleaving, a single V2500 cabinet supports from one to 32 GBs of SDRAM physically distributed on two to eight memory boards. Separate read and write busses mirror the HyperPlane architecture, allowing for double the memory bandwidth. The V2250 supports up to 16 GBs of memory with up to 32-way interleaving.

PCI I/O Subsystem

Each V2500 cabinet supports up to 28 240-MB/s 64-bit PCI interfaces. In addition, each of the bi-directional 240-MB/s I/O ports is capable of direct memory access (DMA). This design eliminates CPU involvement during data transfers, reserving the CPUs for user work. It also streamlines data transfer for large disk blocks and high-speed network connections.

As a result, the V-Class provides industry-leading performance in almost any benchmarking discipline.

High Availability for Mission-Critical Environments

As more applications become mission-critical, maximum availability is an absolute requirement. HP addresses these requirements at various levels with consulting, services, and products such as MC/ServiceGuard. At the system level, reliability and serviceability features are integrated into the V-Class.

Reliability—The inherent reliability of the V-Class has been improved even further with the V2500 due to a design consisting of fewer system parts. The V-Class provides numerous reliability and redundancy features that can minimize the impact of any failure, such as system-wide ECC protection, which ensures memory integrity and increases reliability.

In the event of a memory module failure, Dynamic Memory Resilience will block the affected memory range and allow the system to keep running. And should an I/O problem occur, alternate pathing (AP) allows for redundant I/O and network controllers to take over the job and to keep the system running.

The distributed N+1 power system allows for automatic de-configuration and online replacement, and N+1 cooling fans can also be replaced online. When configured with redundant components, the automatic reboot feature allows the system to recover from hardware failures. External disk arrays provide additional redundancy and hot-swap capabilities.

Service Support Processor

For ongoing local or remote system monitoring and management, a dedicated service support processor is provided. This service support processor ensures system health through environmental sensing and preventive maintenance, and allows for very fast system re-boot and eventually deconfiguration of components to ensure availability—even in the case of a failure.

HP's Scalable Computing Architecture

For multi-terabyte data warehouse implementations, complex technical computing, or other demanding applications, scaling beyond a 32-way HP 9000 V2500 server—the most powerful SMP system on the market today—may be necessary. While cluster configurations are a good solution for certain applications, the increased management and application development complexity associated with the typical cluster may not be a good fit for others. This is particularly true if a standard application must continue to run and scale well.

HP's Scalable Computing Architecture (SCA) has proven its functionality and ability to scale for years, and now is uniquely positioned to provide the resources needed to meet the demands of these applications without a disruptive and expensive box swap.


Used as a basic building block combined with a high-bandwidth SCA Hyperlink, the V2500 makes it possible to configure a system with incredible performance and scalability.

Configuration Flexibility

SCA configurations can scale up to 128 PA-8500 CPUs, 128 GB of memory and 112 2X PCI slots. Whatever the configuration, a single copy of standard HP-UX 11 allows you to run unmodified any of the more than 15,000 applications available.

Every V2500 cabinet can be configured to become part of an SCA configuration at a later point in time, providing unprecedented headroom. Up to four cabinets can be combined. And when requirements change, an SCA configuration can be re-deployed as individual systems.

The use of MC/ServiceGuard allows you to combine two SCA configurations for even higher levels of availability through automatic failover.

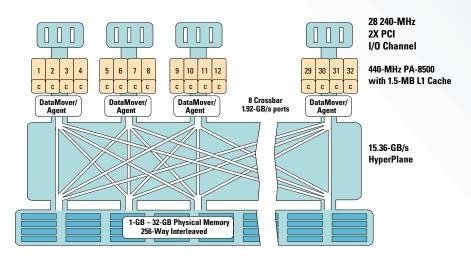

Architecture and Technology

HP's Scalable Computing Architecture is based on a globally shared memory access known as cache-coherent non-uniform memory access (ccNUMA). SCA uniquely combines the most powerful SMP system with more than 3.84-GB/s interconnect bandwidth. A fully configured four-cabinet SCA configuration provides 61.44-GB/s memory bandwidth and 7.6-GB/s I/O throughput.

All resources, including I/O, are transparently accessible and local cabinets keep a large amount of coherent cache, which allows for local memory access most of the time. The 8-way interleaved interconnect supports up to 256 outstanding memory requests, significantly reducing the average memory latency for remote cabinet access.

HP-UX 11 provides sophisticated capabilities to balance the workload across multiple cabinets and to optimize local versus remote cabinet memory access. The result is extraordinary performance and high scalability for a wide variety of business requirements.

Reducing TCO through Application Consolidation

Traditional client/server implementations used multiple systems for multiple applications, increasing overall management complexity as well as total cost of ownership (TCO). Now, the power of the HP 9000 V-Class servers, in combination with HP's Process Resource Manager (PRM), allows you to consolidate multiple applications on a single system. System resources such as processors, memory, and I/O cards can be assigned to dedicated applications, enabling service-level agreements (SLAs), workload management, and simplified capacity planning.

Existing 32-bit HP-UX applications, as well as 64-bit HP-UX applications, can equally benefit from the large memory of the V-Class.

The truly dynamic nature of this solution allows the system to make unused resources available to other applications. This allows better utilization of available resources and a potential reduction in TCO, particularly if the different applications require peak performance at different times of the day. Management complexity of a more distributed

configuration in one or multiple chassis can also be significantly reduced. And, for true high-availability requirements, a second system can be stacked without requiring additional floor space.

Delivering the Complete Platform Solution

Industry-Leading HP-UX 11—HP's highly scalable, mainframe-class 64-bit operating system enjoys the highest level of ISV enthusiasm and allows you to choose from more than 15,000 applications. All major databases and leading ERP applications are available as native 64-bit versions. Complete binary compatibility significantly lowers the risk, effort, and cost of migrating to IA-64—based systems in the future. HP-UX 11 also turns the V-Class into an ideal Java $^{\rm M}$ platform and provides sophisticated Windows NT $^{\rm M}$ integration.


High Availability for Mission-Critical Applications-

HP's vision for the platform, operating system, and applications—articulated as 5nines:5minutes—will provide mainframe availability for UNIX systems. As a stepping stone towards delivering on this vision, today HP offers Mission Critical Server Suites that guarantee 99.95% uptime for selected V-Class configurations. And with HP Campus, Metro, and Continental Clusters, HP provides the widest and most robust range of disaster recovery solutions to ensure the highest levels of availability—beyond what a mainframe can provide.

Mass Storage Choices to Meet Your Connectivity, Capacity, and Performance Needs—HP's V-Class supports a wide range of HP's industry-leading mass storage components. Combined with our partnership and close integration with EMC Symmetrix, HP storage solutions deliver the highest levels of performance, connectivity, and capacity to your mission-critical data center.

World-Class Consulting, Service, and Support-

Consistently rated at the top for excellence in customer support, HP Consulting has extensive experience in defining, sizing, and implementing projects such as large-scale mainframe-alternative and ERP projects. The goal of our consulting, service, and support offerings is to work with you to establish an IT infrastructure that will help ensure your business success.

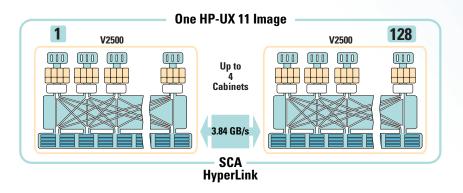

Technical Specifications

System Processing Unit Central processor 64-bit PA-RISC Clock frequency 240 MHz Number of processors 1–16 Cache size (per processor) Direct map 2-MB L2 Data 2-MB L2 Instr Operating environment HP-UX 11 HyperPlane Crossbar, Memory Subsystem (SMP, SCA) Memory architecture Crossbar-basi	Cache	V2500 (1 Cabinet) 64-bit PA-RISC PA-8500 440 MHz 2-32 Four-way set-associative 1-MB L1 Data Cache (on-chip) 0.5-MB L1 Instruction Cache (on-chip) HP-LIY 11	SCA configuration 64-bit PA-RISC PA-8500 440 MHz 2-128 Four-way set-associative 1-MB L1 Data Cache (on-chip) 0.5-MB L1 Instruction Cache (on-chip)
Clock frequency 240 MHz Number of processors 1–16 Cache size (per processor) Direct map 2-MB L2 Data 2-MB L2 Instr Departing environment HP-UX 11 HyperPlane Crossbar, Memory Subsystem (SMP, SCA)	Cache	440 MHz 2–32 Four-way set-associative 1-MB L1 Data Cache (on-chip) 0.5-MB L1 Instruction Cache (on-chip)	440 MHz 2–128 Four-way set-associative 1-MB L1 Data Cache (on-chip)
Number of processors Cache size (per processor) Direct map 2-MB L2 Data 2-MB L2 Instr Operating environment HP-UX 11 HyperPlane Crossbar, Memory Subsystem (SMP, SCA)		2–32 Four-way set-associative 1-MB L1 Data Cache (on-chip) 0.5-MB L1 Instruction Cache (on-chip)	2–128 Four-way set-associative 1-MB L1 Data Cache (on-chip)
Cache size (per processor) Direct map 2-MB L2 Data 2-MB L2 Instr Operating environment HP-UX 11 HyperPlane Crossbar, Memory Subsystem (SMP, SCA)		Four-way set-associative 1-MB L1 Data Cache (on-chip) 0.5-MB L1 Instruction Cache (on-chip)	Four-way set-associative 1-MB L1 Data Cache (on-chip)
2-MB L2 Data 2-MB L2 Instr Operating environment HP-UX 11 HyperPlane Crossbar, Memory Subsystem (SMP, SCA)		1-MB L1 Data Cache (on-chip) 0.5-MB L1 Instruction Cache (on-chip)	1-MB L1 Data Cache (on-chip)
HyperPlane Crossbar, Memory Subsystem (SMP, SCA)		HP-IIX 11	•
Memory Subsystem (SMP, SCA)		HP-UX 11	HP-UX 11*
Memory architecture Crosshar-hasi			
multiprocesso	ed symmetric r (SMP)	Crossbar-based symmetric multiprocessor (SMP)	Crossbar-based symmetric multiprocessor (local cabinet) Cache-coherent, non-uniform memor access (remote cabinet)
Type 8 × 8 non-bloo crossbar	king multiported	8 × 8 non-blocking multiported crossbar	8 × 8 non-blocking multiported crossbar (local cabinet) 8-way interleaved, split-transaction SCA HyperLinks (remote cabinet)
Bandwidth (peak) 15.36 GB/s		15.36 GB/s	61.44 GB/s (aggregate peak)
Memory capacity 1 GB to 16 GB	ECC protected	1 GB to 32 GB ECC protected	4 GB to 128 GB ECC protected
Memory interleaving Up to 32-way		Up to 256-way	Up to 256-way per cabinet
I/O Subsystem			
Number of channels 8 × 32-bit PCI		8 × 64-bit PCI	32 × 64-bit PCI
Channel bandwidth 240 MB/s (bid	rectional)	240 MB/s(bidirectional)	240 MB/s (bidirectional)
Peak aggregate I/O channel 1.9 GB/s pandwidth	roodonary	1.9 GB/s	7.6 GB/s
Number of PCI I/O cards 1–24		1–28	4–112
Token Ring	ATM, Fibre Channel, 1000Base-SX, bric, X.25	FWD SCSI-2, Ultra2 SCSI, ATM, Fibre Channel, Token Ring 10/100Base-T, 100 Base-Fx, 1000 BaseSX GB, FDDI, HyperFabric, X.25	FWD SCSI-2, Ultra2 SCSI, ATM, Fibre Channel, Token Ring 10/100Base-T, 100 Base-Fx, 1000 BaseSX GB, FDDI, HyperFabric, X.25
User accessible media drives 650-MB 12X C 12-GB DDS-3		DVD drive 12-GB DDS-3 DAT drive	DVD drive 12-GB DDS-3 DAT drive
Internal Storage (not supported for HA configurations)			
Number of drives 16		16	64
Capacity (max) 288 GB		288 GB	1.1 TB
Rack	9" RETMA standard Fibre Channel orage	Supported in 19" RETMA standard Rack Up to 50 TB of Fibre Channel information storage	Supported in 19" RETMA standard Rack Up to 200 TB of Fibre Channel information storage
Physical Specifications			
-	+ 31.5" (80.01) + per cabinet	39" (99.06 cm) + 31.5" (80.01) + 37" (93.98 cm) per cabinet	39" (99.06 cm) + 31.5" (80.01) + 37" (93.98 cm) per cabinet
Maximum cabinet weight 490 lb. (222.73	kg)	490 lb. (222.73 kg)	490 lb. (222.73 kg)
Environmental Specifications			
Operating temperature 60–80°F (15.6-	26.7°C)	60-80°F (15.6-26.7°C)	60-80°F (15.6-26.7°C)
Humidity 40–60%	•	40–60%	40–60%
•	ccal/h) maximum	7500 W (5934 kcal/h) maximum	7500 W (5934 kcal/h) maximum
Power requirements 208/220 VAC s 200 VAC single	ingle-phase (U.S.) e-phase (Far East) e-phase (Europe)	208/220 VAC single-phase (U.S.) 200 VAC single-phase (Far East) 230 VAC single-phase (Europe)	208/220 VAC single-phase (U.S.) 200 VAC single-phase (Far East) 230 VAC single-phase (Europe)
* SCA available in 20CV99			

^{*} SCA available in 2QCY99.



For the location of the nearest sales office call:

United States of America:

+1 800 637 7740

Canada:

Hewlett-Packard Ltd. 5150 Spectrum Way Mississauga, Ontario L4W 5G1 +1 905 206 4725

Japan:

Hewlett-Packard Japan, Ltd. Japan Country H.Q. 3-29-21, Takaido-Higashi, Suginami-ku, Tokyo, 160-8585 Japan +81 3 3331 6111

Latin America:

Hewlett-Packard Latin American Region Headquarters Waterford Building, 9th Floor 5200 Blue Lagoon Drive Miami, Florida 33126 USA +1 305 267 4220 Refer to country phone numbers

Australia/New Zealand:

Hewlett-Packard Australia Ltd. 31-41 Joseph Street Blackburn, Victoria 3130 Australia (A.C.N. 004 394 763) +61 3 9272 2895

Asia Pacific:

Hewlett-Packard Asia Pacific Ltd. 17-21/F, Shell Tower Times Square 1 Matheson Street Causeway Bay Hong Kong +8522 599 7777

Europe/Africa/Middle East:

Hewlett-Packard S.A. 150, Route du Nant-d'Avril CH-1217 Meyrin 2 Geneva, Switzerland +41 22 780 81 11 European Multicountry: +4

European Multicountry: +41 22 780 81 11 Middle East and Africa: +41 22 780 71 11 European Headquarters: +41 22 780 81 81 Refer to country phone numbers For direct country contact call:

Argentina: +541 787 7145

Austria: +43 1 25 000 0

Belgium and Luxembourg:

+32 2 778 31 11

Brazil: +5511 7296 8000

Chile: +562 203 3233

East Central Europe, CIS, and Yugoslavia:

+43 1 25 000 0

Colombia: +571 629 5030

Denmark: +45 45 99 10 00

Finland: +358 9 887 21

France: +33 1 69 82 60 60

Germany: +49 7031 140

Greece: +30 1 689 644

Hungary: +36 1 252 7300

Iceland: High Performance Systems hf.

+354 1 67 10 00

Ireland: +353 12 88 33 99

Israel: Computation and Measurement Systems (CMS) Ltd. +972 3 5380 333

Italy: +39 2 92122770

Mexico: +525 326 4600

Netherlands: +31 20 547 6911

Norway: +47 22 7356 00

Poland: +48 22 608 77 00

Portugal: +351 1301 7343

Russia and the CIS, Excl. Ukraine:

 $+7\ 095\ 923\ 5001$

Slovenia: +38 61 55 84 72

Spain: +34 1 631 1600

Sweden: +46 8 444 2000

Switzerland: +411 735 7111

South Africa: Hewlett-Packard South Africa (Pty) Ltd.

+27 11 806 1000

Turkey: +90 212 224 5925

United Kingdom: +44 1344 369231

Venezuela: +582 239 4133

For more information, contact any of our worldwide sales offices or HP Channel Partners (in the U.S. call 1 800 637 7740) or visit HP at our Web site:

www.hp.com/go/datacenter

Java is a U.S. trademark of Sun Microsystems, Inc. Windows NT is a U.S. registered trademark of Microsoft Corporation. UNIX is a registered trademark of The Open Group.

Technical information contained in this document is subject to change without notice.

© Copyright Hewlett-Packard Company 1998.

All Rights Reserved. Reproduction, adaptation, or translation without prior written permission is prohibited except as allowed under the copyright laws.

11/98

5968-2837E